


DEMOLITION SORTING GRAB HSG

Silent Demolition and Sorting/Loading Grapple

- With 360 degree rotator, operator can align jaws without moving machine and pick material from any angle.
- With synchronized jaws, operator can pick small items and place very precisely.

AUTHORIZED DEALER

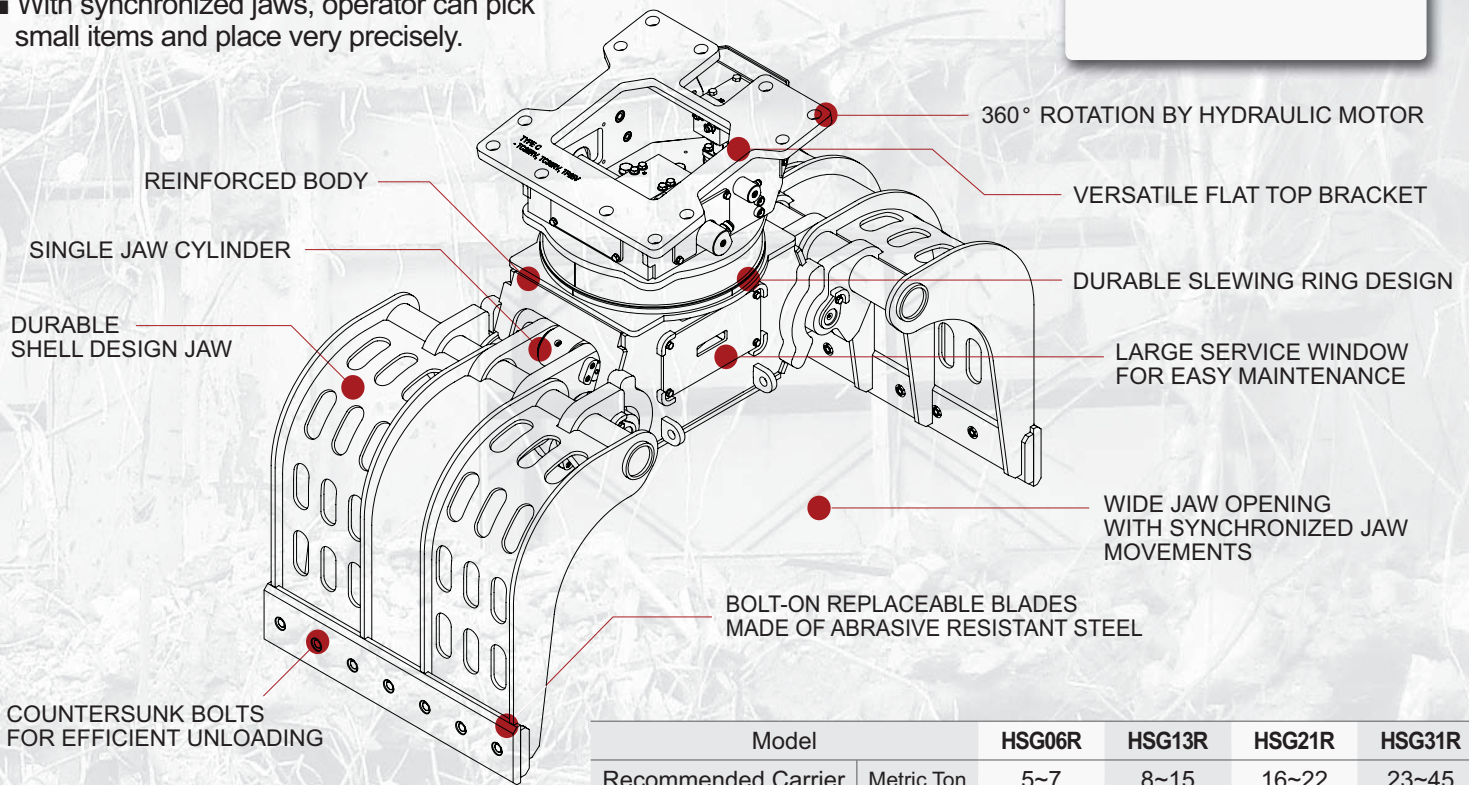

Model		HSG06R	HSG13R	HSG21R	HSG31R	
Recommended Carrier	Metric Ton	5~7	8~15	16~22	23~45	
Weight	kgs	460	1,040	1,580	2,150	
	lbs	1,012	2,288	3,480	4,730	
Opening	mm	1,500	1,900	2,130	2,250	
	inch	59	75	84	89	
Width	mm	500	900	1,000	1,300	
	inch	20	35	39	51	
Depth	mm	480	520	625	650	
	inch	19	20	25	26	
Areal Capacity	m ²	0.30	0.60	0.80	0.90	
	yd ²	0.39	0.78	1.04	1.17	
Volume Capacity	liter	150	540	800	1,170	
	yd ³	0.62	1.57	2.35	2.79	
Jaw	Rated Pressure	bar	250	350	350	350
		psi	3,630	5,080	5,080	5,080
	Rated Flow	lpm	50	80	120	160
		gpm	13	21	31	42
Closing Force	Metric Ton	3.7	5.2	7.0	7.8	
	lbs (x1,000)	1.68	2.36	3.18	3.55	
Rotator	Rated Pressure	bar	150	170	170	170
		psi	2,175	2,465	2,465	2,465
	Rated Flow	lpm	9	17	35	49
		gpm	2	4	9	13
Speed	RPM	15	12	12	12	

Specifications are subject to change without notice.