


ROTATING PULVERIZERS TP-RW

Designed secondary processing to remove rebar and size concrete.
360 degree hydraulic rotation increases productivity.
Replaceable teeth reduce maintenance time and cost.




AUTHORIZED DEALER

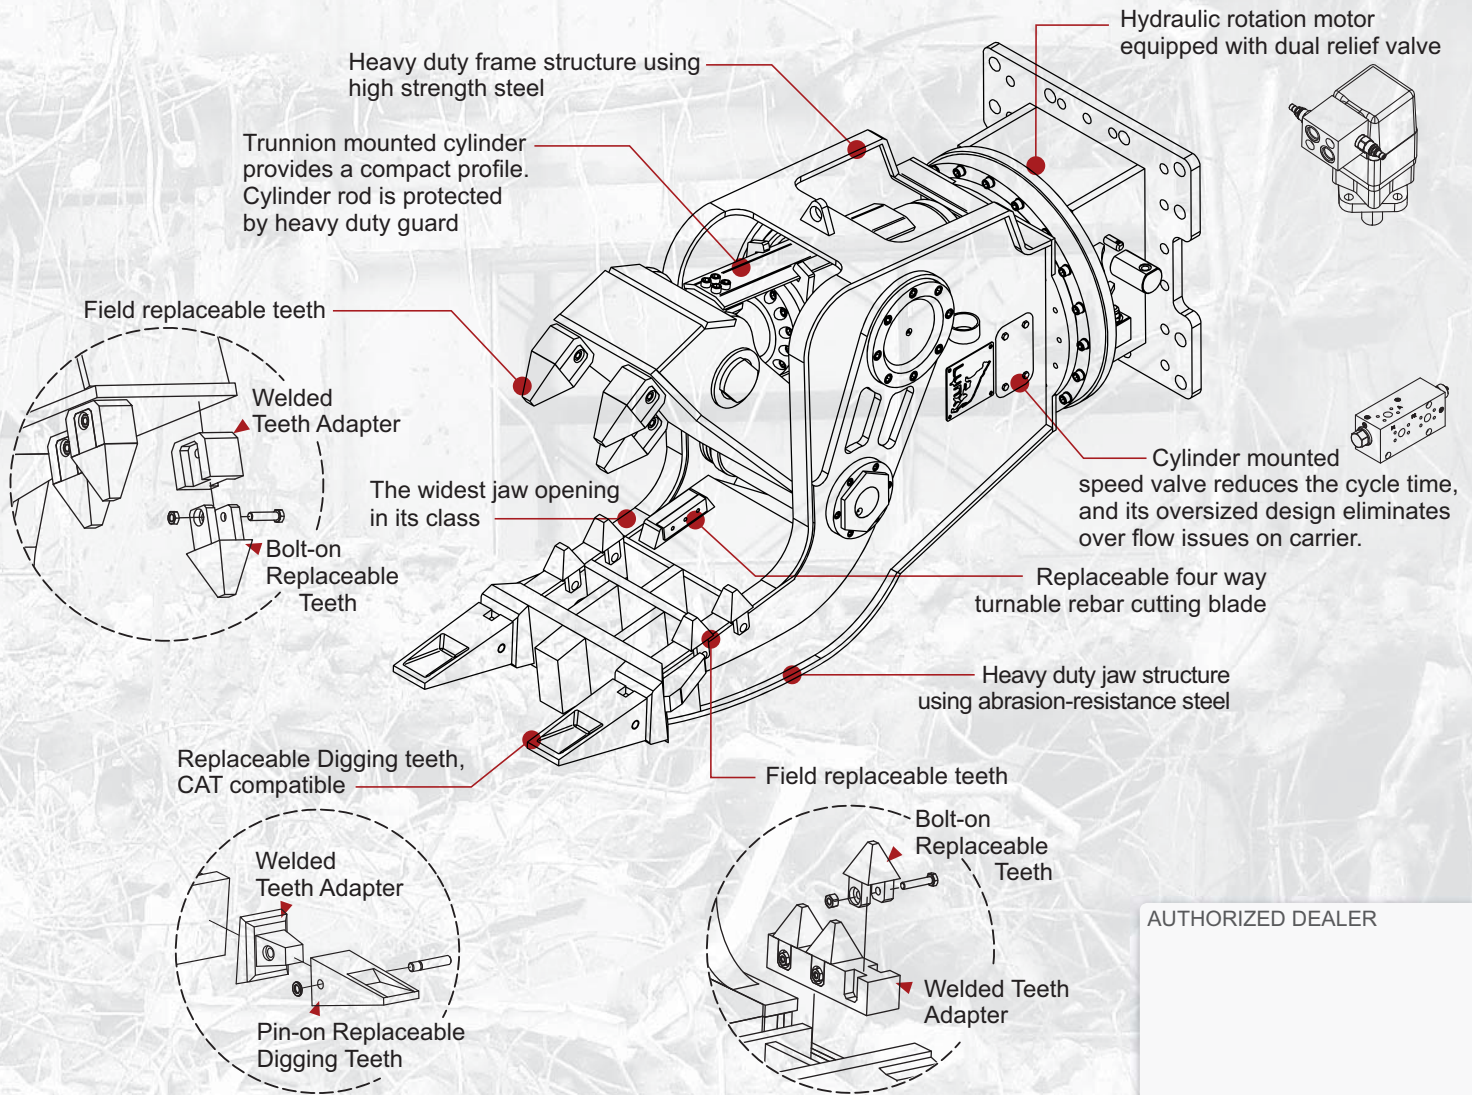

DEMOLITION

ROTATING PULVERIZERS TP-RW

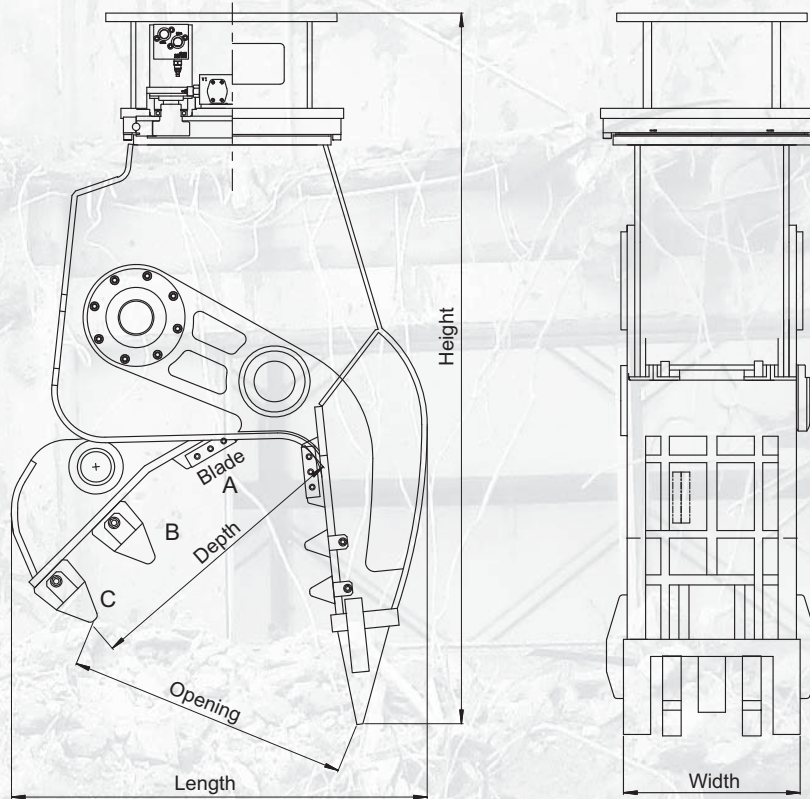

Model		Unit	TP15RW	TP20RW	TP25RW	TP30RW	Unit	TP15RW	TP20RW	TP25RW	TP30RW
Carrier Weight		M/T	12~20	18~28	23~30	30~35	M/T	12~20	18~28	23~30	30~55
Operating Weight		kg	1,190	1,910	2,250	2,800	lb	2,620	4,220	4,950	6,160
DIM	Height	mm	1,850	2,090	2,478	2,620	inch	73	82	98	103
	Length		1,170	1,250	1,420	1,620		46	49	56	64
	Width		520	520	540	600		20	20	21	24
Jaw Opening		mm	780	910	925	1,100	inch	31	36	36	43
Jaw Depth			820	865	870	900		32	34	34	39
Blade Length			140	150	200	200		5.5	5.9	7.9	7.9
Cutting Force [A]		M/T (Metric Ton)	163	186	202	257	lb (X1000)	359	409	444	565
Crushing Force	[B] Mid		67	84	95	121		147	185	209	266
	[C] Tip		42	54	62	79		93	119	137	174
Rated Pressure		bar	320				psi	4,600			
Rated Oil Flow		lpm	160	280	320	360	gpm	42	74	84	95
Hyd. Rotation	Pressure	bar	180	210	210	210	psi	2,610	3,050	3,050	3,050
	Oil Flow	lpm	28~32	30~38	32~45	32~45	gpm	7.5~8.5	8~10	8.5~12	8.5~12
	Speed	RPM	10~15		10~15		RPM	10~15		10~15	
Cycle time	Open	sec	1.9	2.9	2.2	2.2	sec	1.9	2.9	2.2	2.2
	Close		1.8	3.0	1.9	1.9		1.8	3.0	1.9	1.9

Specifications subject to change without notice.

- Height : Flat Top Mounting
- Cycle Time : Measured at rated flow under no load.