



DEMOLITION SECONDARY PULVERIZERS TP-W



Designed secondary processing to remove rebar and size concrete. Replaceable teeth reduce maintenance time and cost.

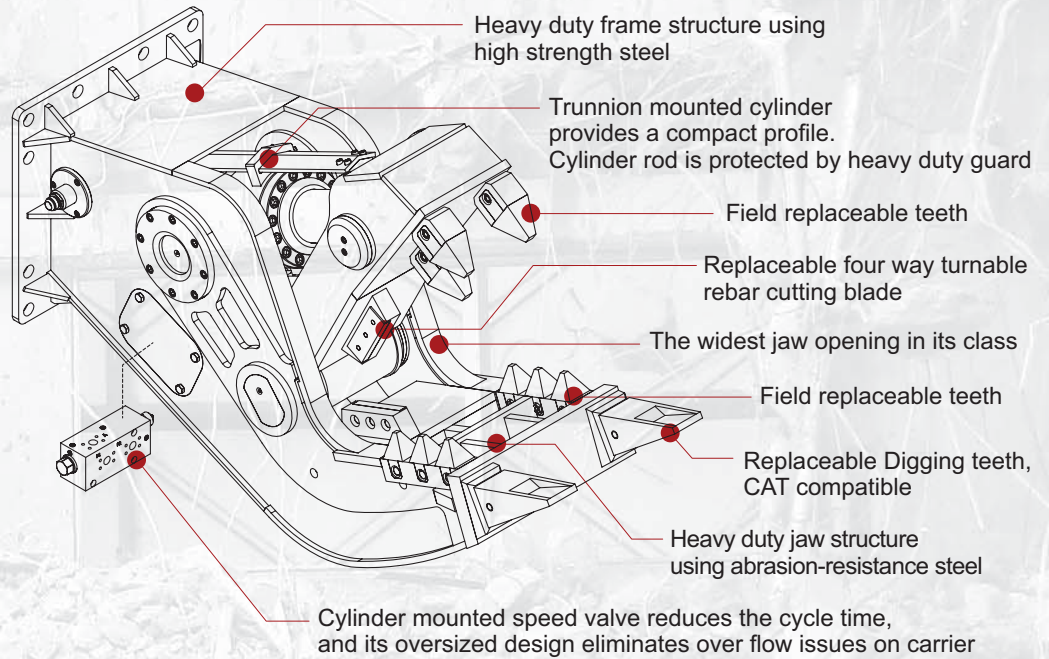


TEETH COMPARISON with V series

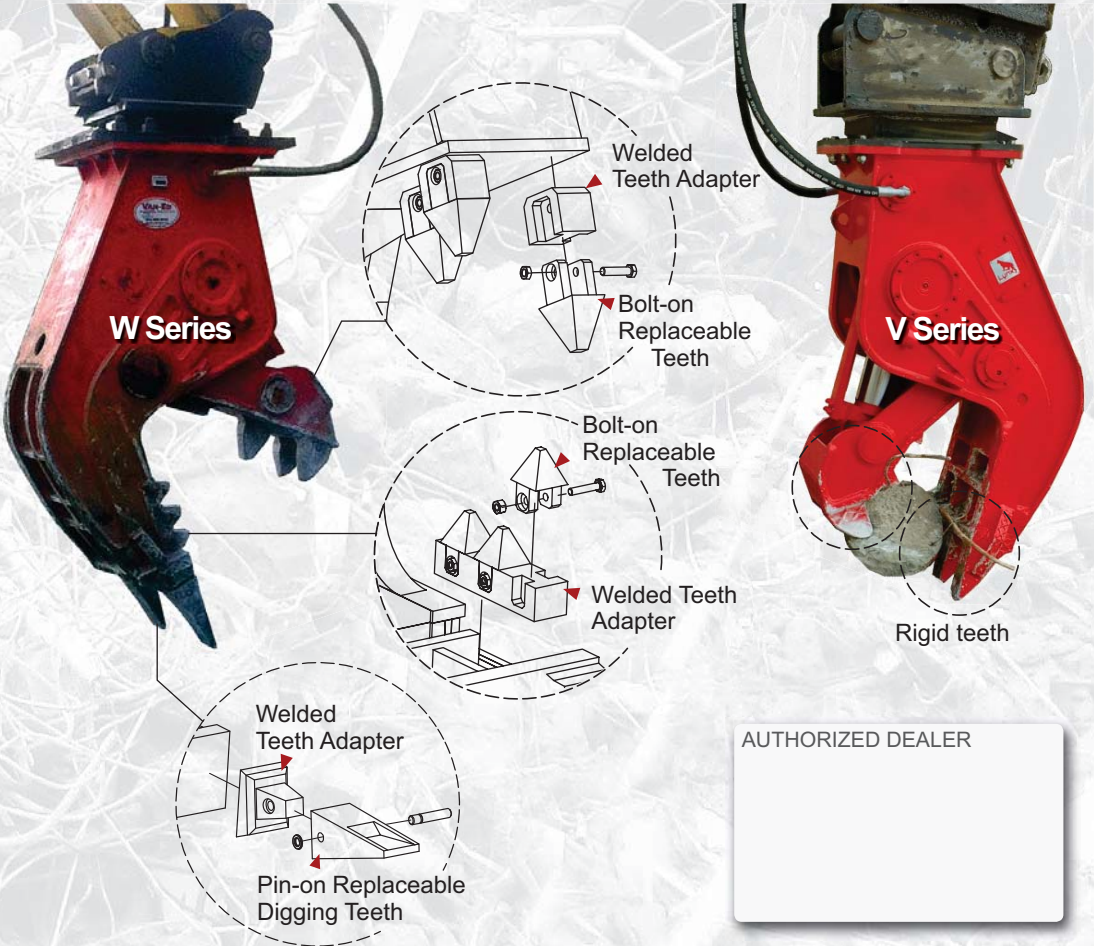

AUTHORIZED DEALER

DEMOLITION

SECONDARY PULVERIZERS TP-W

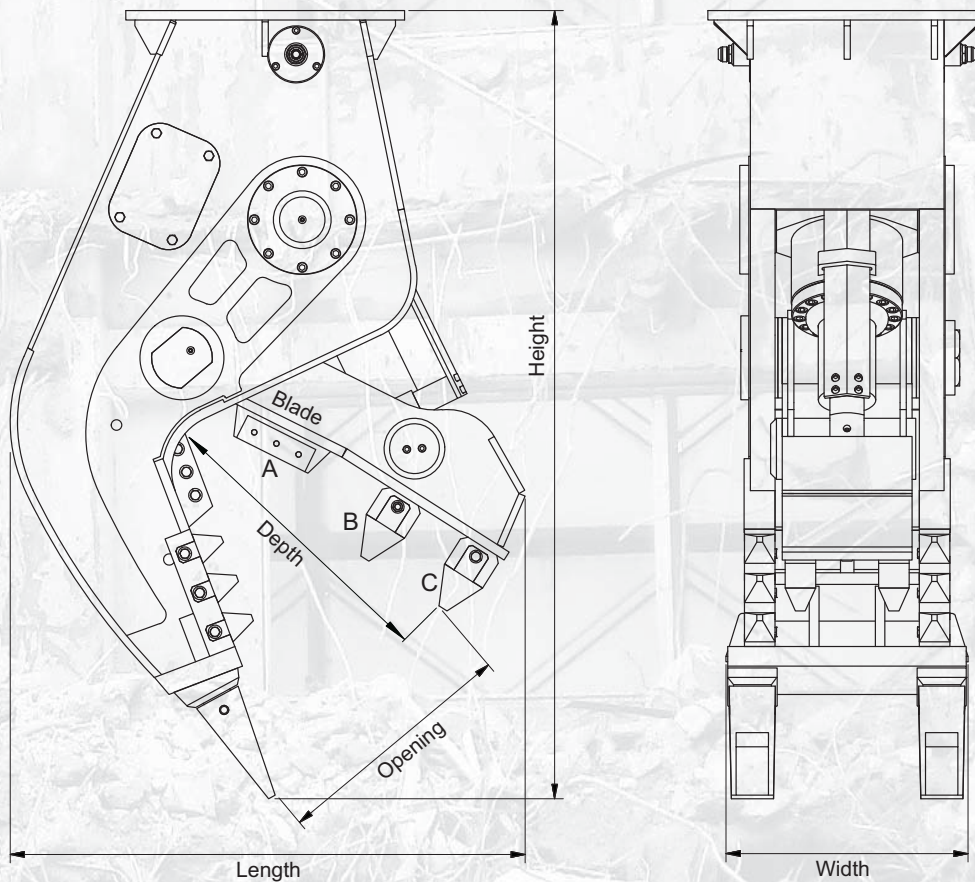

Model	Unit	TP 15W	TP 20W	TP 25W	TP 30W	TP 35W	Unit	TP 15W	TP 20W	TP 25W	TP 30W	TP 35W							
Carrier Weight	M/T	10~20	17~25	23~36	24~42	35~45	M/T	10~20	17~25	23~36	24~42	35~45							
Operating Weight	kg	1,020	1,560	2,040	2,450	3,600	lb	2,240	3,430	4,490	5,390	7,920							
DIM	Height	1,650					1,830	1,960	2,190	2,600	65			72	77	86	102		
	Length	mm					1,230	1,250	1,420	1,620	2,200	inch			48	49	56	64	87
	Width	436					520	540	600	830	17			20	21	24	33		
Jaw Opening	mm	780	840	925	1,100	1,190	inch	31	33	36	43	47							
Jaw Depth	mm	820	825	870	990	1,100	inch	32	32	34	39	43							
Blade Length	mm	140	150	200	200	250	inch	5.5	5.9	7.9	7.9	9.8							
Cutting Force [A]	M/T (Metric Ton)	163	191	202	257	306	lb (X1000)	359	420	445	565	673							
Crushing Force		[B] Mid	67	91	95	121		132	147	200	209	266	290						
		[C] Tip	42	60	62	79		98	93	132	137	174	216						
Rated Pressure	bar	320					psi	4,600											
Rated Oil Flow	lpm	160	210	280	320	360	gpm	42	55	74	84	95							
Cycle time	Open	2.1					2.1	2.2	2.2	3.0	2.1			2.1	2.2	2.2	3.0		
	Close	1.9					1.9	1.9	1.9	3.1	1.9			1.9	1.9	1.9	3.1		

Specifications subject to change without notice.

- Height : Flat Top Mounting
- Cycle Time : Measured at rated flow under no load.